



## CUTTING INSTRUCTIONS FOR USING IKO LAMINATED SHINGLES FOR HIPS AND RIDGES

IKO offers a wide range of laminated shingles in various sizes and designs, such as our popular Cambridge and Chateau shingles, and our APP modified Dynasty. Normally hip and ridge or three tab shingles (in matching color blends) are available to cap laminated shingle roofs. Occasionally, it may be necessary or desired to cap the roof with the laminated shingles, in which case, the procedures shown below should be followed.

- You will be able to get three 13" - 14" pieces of capping out of each shingle, depending on shingle length. (IKO manufactures laminated shingles to different lengths at different manufacturing plants.)
- Cut as per Diagram 1 below.
- Cut back the headlap of each cap piece at approximately a 30 degree angle on both edges. See Diagram 2.
- Install each piece of capping using 2 nails, each nail installed in the nail line, 1" in from each side. See Diagram 3. Bend each piece carefully to avoid damage. (Note: Some slight delamination of the two pieces may occur, especially if bending in cold weather or at sharp-angles ridges.) Expose each piece to the top of the dual-layer portion in the piece below.

Diagram 1

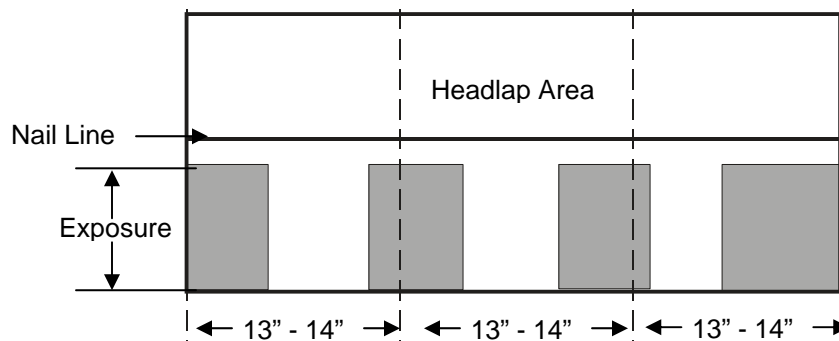


Diagram 2


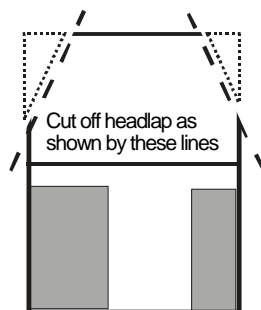


Diagram 3

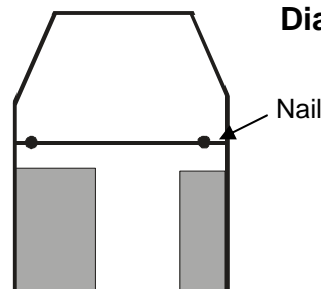

For additional information on any of IKO's products or application requirements, visit us on the web at [www.iko.com](http://www.iko.com), or contact us in Canada at 1-888-766-2468, or the United States at 1-888-456-7663.