

# IKO Mod-Bit Primer

MOD-BIT PRIMER



# IKO

## COMMERCIAL®

Specify with Confidence.



STOCK# 7870010

SIZE: 18.93L (5 US gal)

PAILS PER PALLET: 36

PALLET SIZE: 122 cm x 102 cm

(48 in x 40 in)

COVERAGE\*: 4 m<sup>2</sup>/L to 7 m<sup>2</sup>/L

(165 ft<sup>2</sup>/gal to 250 ft<sup>2</sup>/gal)

DRYING TIME: 60 minutes

Note: All reported values are nominal.

## IKO Mod-Bit Primer

MOD-BIT PRIMER

### Solvent Based

IKO Mod-Bit Primer is solvent-based and intended to prepare roofing and wall surfaces prior to applying heat-welded membranes.

### Suitable for Multiple Substrates

The modified bitumen enhances membrane adhesion to a variety of substrates such as gypsum, masonry, metal, concrete or CMU and improves membrane performance over a wide range of temperatures and conditions.\*

\*Depending on porosity and texture of surface

### Easy Application

IKO Mod-Bit Primer can be applied with a brush, roller or sprayer.

### Quick Drying

IKO Mod-Bit Primer is formulated with a rubber modified bitumen and fast-evaporating solvents for quick drying.

Quick drying and easy to apply, let IKO Mod-Bit Primer go to work for your next project.

- EASY APPLICATION
- QUICK DRYING

# IKO Mod-Bit Primer

MOD-BIT PRIMER




**Application considerations:** Surfaces to be primed must be dry and clean. Primer must be thoroughly dry before attempting to apply the membrane. Do not attempt to accelerate the drying time of the primer by heating with a torch! Always use caution when handling flammable materials.

All local health and safety rules and precautions should be followed when working with IKO products. See Also Material Safety Data Sheet MSDS #1255.

Good building practices include ensuring the application surface is adequately prepared for the adhesion of the product prior to installing it. For further details please refer to the “IKO Installation Guidelines”.

IKO Mod-Bit Primer meets the requirements of CGSB 37-GP-9Ma and ASTM D41.

Please contact your IKO Technical Representative for specific slope requirements.

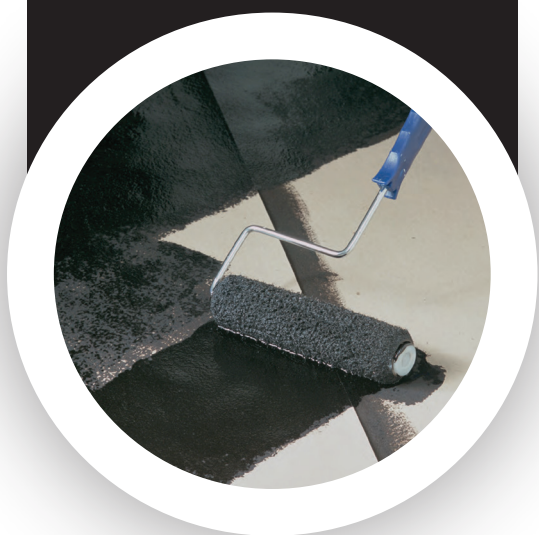

CHARACTERISTICS	UNITS	NOMINAL VALUE
Non-Volatile (By Weight):	%	35
Flash Point (TCC):	°C (°F)	> -18 (-4)
Specific Gravity:	Kg/L	0.896
Viscosity @ 25°C	cps	50 - 100
Volatile Organic Compounds (VOC):	g/L	<350
Minimum Application Temperature:	°C (°F)	> -12 (10.4)
Coverage	m <sup>2</sup> /L (ft <sup>2</sup> /gal)	4 to 7 (165 to 250)
Drying Time (@ 50% R.H., 25°C, and Dry Substrate)**	Hours	1

The information on this product information sheet is based upon data considered to be true and accurate, based on laboratory tests and production measurements, and is offered solely for the user's consideration, investigation and verification. Nothing contained herein is representative of a warranty or guarantee for which the manufacturer can be held legally responsible. The manufacturer does not assume any responsibility for any misrepresentation or assumptions the reader may formulate.