



InnoviBondTM

DUO Dual-Tank Adhesive, Parts A&B

Stock #: TRA-PRT-A50, TRA-PRT-B50

UOM Dimensions: 12" x 12" x 18"

UOM Cubic Dimensions: 1.5 ft³

Packaging:

Pressure Tanks

Sold in Pairs: (1) Part A tank carton with gun/hose assembly, accessory kit, straws and (1) Part B tank carton

Accessories

25-ft Gun Assembly with Hose, 10 Static Mixers, 10 Shower Cap Tips, Petroleum Jelly Packet, One Push-to-Connect Manifold, 1 NOX Valve, and instruction Sheet

Weight: Part A = 59.7 lbs. Part B = 56 lbs.

Cartons per Pallet: 24 (12 cartons of Part A and 12 cartons of Part B)

All reported values are nominal.

- Remains flexible, absorbs stress.
- Provides superior wind-uplift resistance.
- Eliminates thermal bridging.

System Compatibility

IKO InnoviBond is intended for use with IKO InnoviTPO Roofing Systems and is approved for use with an appropriate IKO Diamond Shield Limited Warranty. Building owners, specifiers, roof consultants and roofing contractors are invited to review the IKO InnoviTPO System Specifications at www.iko.com/comm for further information on including this product as part of a complete IKO roofing system.

Key Accessory for Professional Commercial Roof Installation

IKO InnoviBond Roofing Adhesive is a construction-grade, polyurethane foam adhesive designed to adhere approved roof insulations, thermal barriers, cover boards and fleece-backed membranes to acceptable substrates.

Product Features

- Clean, fast, one-step application, resulting in significant labor savings for the contractor
- Full cure within minutes
- No compressed or melted insulation
- One formula for insulation and fleece-back membrane attachment
- Self-contained



COMMERCIAL[®]
Specify with Confidence.

InnoviBondTM DUO Dual-Tank Adhesive, Parts A&B


Proper Ratio

The adhesive must be dispensed in a 1:1 ratio.

Proper Coverage

InnoviBond adhesive is applied in 3/4-inch-wide beads or ribbons (applied using a straw attached to a static mixer) spaced 4, 6 or 12 inches on center depending on the conditions of the project. Splatter pattern application, for fleece back membrane attachment, can be obtained by using the shower cap tip included in the pressurized tank sets. Good coverage recommendations are based on a typical application of 3 lbs. of adhesive applied per 100 square feet.

Expected yield per tank set

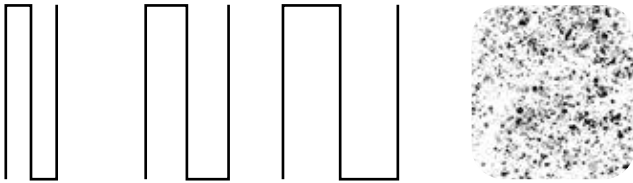

Ribbon Application			Splatter Application
4" on-center	6" on-center	12" on-center	3 lbs. of adhesive per 100 sq. ft.
1,165 sq. ft. coverage*	1,750 sq. ft. coverage*	3,500 sq. ft. coverage*	2,400 sq. ft. coverage*

Proper Temperature

- Substrate and ambient temperature must be above 32F.
- Pressurized tank temperature must be between 70F and 85F.
- Ideal storage temperature is between 55F and 90F.

Asphalt and IKO InnoviBond Roofing Adhesive

InnoviBond Roofing Adhesive does not stick to new or previously unexposed, asphalt that has a shiny appearance. Whenever shiny asphalt is encountered, the asphalt must be primed prior to the installation of the adhesive. Also, an on-site pull test is recommended.

The information on this sheet is based on data supplied by the manufacturer to IKO and believed to be true and accurate. The information is offered solely for the user's consideration, investigation and verification. Nothing contained herein constitutes or represents a warranty or guarantee for which the manufacturer or the distributor can be held legally responsible.