

S.A.M. Adhesive LVC

SELF-ADHERING
MEMBRANE ADHESIVE



IKO® COMMERCIAL



STOCK# 1850033

SIZE: 17 L (4.49 gal)

PAILS PER PALLET: 36

PALLET SIZE: 122 cm x 102 cm

(48 in x 40 in)

COLOUR: Green

COVERAGE: 6m²/L

DRYING TIME: 60 Minutes

Note: All reported values are nominal.

IKO S.A.M. Adhesive LVC offers a low VOC solution and is an outstanding quick drying product for self-adhering membranes. Let S.A.M. Adhesive LVC go to work for your next commercial building project.

- VERSATILE
- LOW VOC*

* Volatile Organic Compounds

S.A.M. Adhesive LVC

SELF-ADHERING MEMBRANE ADHESIVE

Low VOC

IKO S.A.M. Adhesive LVC is a low VOC solvent-based adhesive for use with IKO self-adhering roofing membranes or IKO AquaBarrier™ self-adhering membranes.

Multi-Use

IKO S.A.M. Adhesive LVC is suitable for use on most substrates including wood, glass mat/gypsum sheathing, masonry, concrete and metal. All substrates should be clean, dry and free from dust, dirt, oil and grease.

Ideal for Vertical & Horizontal Surfaces

S.A.M. Adhesive LVC dries to a high tack, providing excellent adhesion properties during the application process, and is especially effective on vertical and horizontal surfaces. Actual drying time depends on the ambient temperature and humidity during application.

Easy to Apply and Clean

IKO S.A.M. Adhesive LVC may be applied by using a brush, roller or by mechanically spraying. S.A.M. Adhesive LVC cleans up easily with mineral spirits.

S.A.M. Adhesive LVC

SELF-ADHERING
MEMBRANE ADHESIVE



IKO® COMMERCIAL


IKO S.A.M. Adhesive LVC should always be used in well-ventilated conditions and kept away from all sources of potential ignition.

All local health and safety rules and regulations should be followed when working with IKO Products.

Good building practices include ensuring the application surface is adequately prepared for adhesion of the product prior to installation. For further details, please refer to the "IKO Installation Guidelines."

ISO 9001 – 2008 REGISTERED FACILITY

Please contact your *IKO Technical Representative* for specific slope requirements.

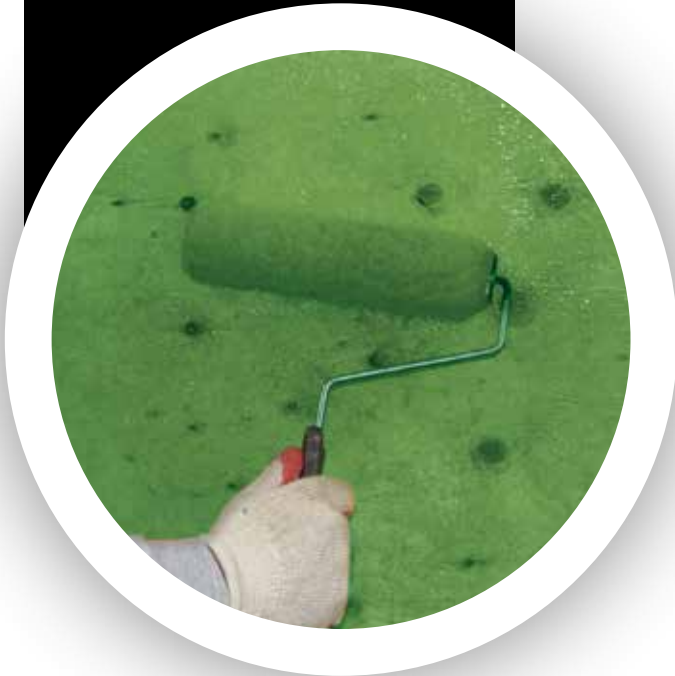

| CHARACTERISTICS | UNITS | NOMINAL VALUE |
|---|--|-----------------------|
| Density: +/- 0.010 | g/ml | 0.87 |
| Solids By Weight: +/- 3% | % | 35 |
| Viscosity: | Cps | 275-375 |
| Coverage (Approximate): | m ² /L (ft ² /gal) | 6 (250) |
| Volatile Organic Compounds (VOC) Content: | g/L | 250 max. |
| Minimum Application Temperature: | °C (°F) | -12 to 40 (10 to 104) |
| Drying Time (25°C and 60% RH) † | | |
| Until Tacky: | min. | 30 - 45 |
| Initial Set: | min. | 60 |

† Drying time information is based on 25°C and 60% RH. Cold temperatures and High humidity will prolong dry times. See also Material Safety Data Sheet MSDS #1165. The information on this product information sheet is based upon data considered to be true and accurate, based on laboratory tests and production measurements, and is offered solely for the user's consideration, investigation and verification. Nothing contained herein is representative of a warranty or guarantee for which the manufacturer can be held legally responsible. The manufacturer does not assume any responsibility for any misrepresentation or assumptions the reader may formulate.