



MarathonTM Plus AR

Marathon Plus AR is a 3-tab asphalt strip shingle, manufactured on a robust fiberglass reinforcement.

FEATURES AND BENEFITS

- ✓ FULL METRIC SIZE
- ✓ BLUE-GREEN ALGAE RESISTANT
- ✓ PROPRIETARY FASTLOCK SEALANT

GENERAL INFORMATION

SHINGLES/BUNDLE	21
COVERAGE/BUNDLE	32.3 ft. ² (3.0 m ²)
COVERAGE/THREE BUNDLES	96.9 ft. ² (9.0 m ²)
BUNDLES/PALLET	60
PALLET SIZE	40 x 53 1/2 in. (102 x 136 cm)
PRODUCT STOCK NO. (U.S.)	4781XXX
PRODUCT STOCK NO. (CANADA)	4780XXX

NOTE: XXX refers to numerical product color code. Product color availability varies by region.

PRODUCT DIMENSIONS

LENGTH	39 3/8 in. (1,000 mm)
WIDTH	13 1/4 in. (336 mm)
EXPOSURE	5 5/8 in. (143 mm)

Product dimensions shown are subject to normal manufacturing tolerances of +/- 1/4 in. (6 mm) on the shingle's length and +/- 1/8 in. (3 mm) width.



FIBERGLASS-REINFORCED ASPHALT SHINGLES

IKO Marathon Plus AR is a traditional 3-tab roofing shingle. Its weather-resistant design is based on a solid construction of durable fiberglass mat to help shield homes against the forces of nature. The classic design of IKO Marathon Plus AR will flatter any style of home. The algae-resistant granules embedded into these shingles will help control the black streaks caused by blue-green algae and will keep them looking great for years to come. And, because they come in a metric size that's larger than many comparable shingles in their class, they're faster to install.

Click [here](#) or scan this QR code for product literature, color swatches and color availability.





MarathonTM Plus AR

APPLICABLE STANDARDS¹

ASTM D3462 Product Standard

ASTM D3018 Product Standard

ASTM D3161 Class F Wind Test

ASTM D7158 Class H Wind Test

ASTM E108 Class A Fire Test²

UL 790 Class A Fire Test²

CAN/ULC S107 Class A Fire Test (Canada)²

CSA A123.5 Product Standard (Canada)

Miami-Dade Product Approval³ [here](#)

Florida Building Code High-Velocity Hurricane Zone (HVHZ) Approval³ [here](#)

Texas Department of Insurance Details [here](#)

NOTE: IKO Marathon Plus AR asphalt shingles meet or exceed the requirements in the product standards referenced at the time of manufacture, including minimum total product weight, minimum tear-strength resistance, maximum granule loss and minimum asphalt mass.



SAFETY INFORMATION

CAUTION: Working at heights on sloped-roof surfaces can be dangerous. Do not install until all appropriate safety precautions are followed. Always wear appropriate personal protective equipment (PPE), including appropriate fall protection equipment.

This product's Safety Data Sheet (SDS) is available [here](#).



SHINGLE INSTALLATION

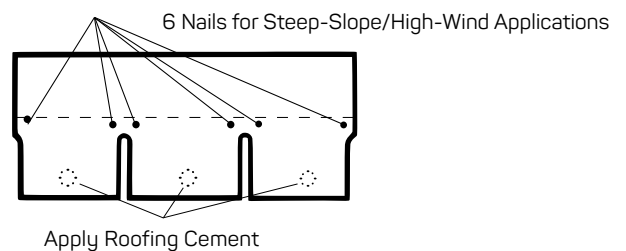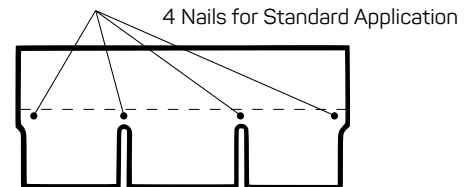

Shingles must be installed according to all of IKO's application instructions. Some select installation requirements are highlighted here.

1. The space beneath the roof deck (e.g., attic) should be thoroughly ventilated to minimum local building code requirements.
2. Shingles should be installed with 5 5/8-inch shingle exposure to the weather.
3. Offsets between courses are recommended to be one-half a tab width. Alternative random offsets are permitted, provided the butt joints in successive courses are not closer together than 4 inches.
4. It is critical that nails are located below the sealant line.
5. Open metal valleys are recommended for best roof system performance.
6. Never apply asphalt shingles to roof slopes less than 2:12. For slopes 2:12 to less than 4:12 (low slope), see special underlayment requirements outlined in the IKO application instructions

Complete product installation details can be found [here](#).



The information on this Technical Data Sheet is based upon data considered to be true and accurate at time of issue, based on laboratory tests and production measurements, and is offered solely for the user's consideration, investigation and verification. Nothing contained herein is representative of a warranty or guarantee for which the manufacturer can be held legally responsible. The manufacturer does not assume any responsibility for any misrepresentation or assumptions the reader may formulate. To confirm the most current product technical information and compliances, please contact IKO directly at: **United States 1-888-IKO-ROOF (1-888-456-7663); Canada 1-855-IKO-ROOF (1-855-456-7663).**

¹Compliance with listed product standards is based on sampling and testing of products as manufactured. ²When shingles are installed with an approved underlayment. ³M-D and FBC HVHZ approvals apply only to shingles available in the southeast U.S. market. For more information, please contact IKO at: **1-888-IKO-ROOF (1-888-456-7663).**