

# ROOF-FAST™ BASE



## Fiberglass-Reinforced Modified Bitumen Membrane

IKO's Roof-Fast Base consists of a durable reinforcing mat of non-woven glass fibers that has been coated and permeated with polymer modified asphalt. The back surface of the sheet is self-adhesive modified bitumen, which is protected by a silicone treated film. During the installation process, the silicone film can be easily removed and the base sheet can be adhered to the roof deck. This prepares the surface for the installation of the Roof-Fast Cap membrane.

Click [here](#) or scan this QR code for product literature, color swatches and color availability.



Roof-Fast Base is a modified bitumen roof membrane that is suited to low slope roof protection in combination with IKO's Roof-Fast Cap sheet.

### 1

#### Features and Benefits

- ✓ Polymer-Modified Asphalt
- ✓ Self-Adhered or Mechanically Attached
- ✓ Fiberglass-Reinforced

### 2

#### General Information

Roll Contents	200 ft. <sup>2</sup> (18.58 m <sup>2</sup> )
Rolls/Pallet	32
Pallet Size	52 x 44 in. (132 x 112 cm)
Product Stock No.	7880005

### 3

#### Product Dimensions

Length	65.92 ft. (20.09 m)
Width	39.375 in. (1000 mm)
Thickness	63 mils (1.6 mm)
Selvage Film Width	3 in. (76 mm)

Product dimensions shown are subject to normal manufacturing tolerances of +/- 1/4 in. (6 mm) on the shingle's length and +/- 1/8 in. (3 mm) width.

# ROOF-FAST™ BASE

## 4 Applicable Standards<sup>1</sup>

ASTM D4601, Type I Product Standard

ASTM E108 Class C Fire Test

UL 790 Class C Fire Test

CAN/ULC S107 Class C Fire Test

CGSB 37-GP-56M, Type 2, Class C, Grade 1 Product Standard (Canada)

Miami-Dade Product Approval [here](#)

Florida Building Code High-Velocity Hurricane Zone (HVHZ) Approval [here](#)


Texas Department of Insurance Details [here](#)

**NOTE:** IKO Roof-Fast Base meets or exceeds the requirements in the product standards referenced at the time of manufacture, including tensile strength, cold flex, and minimum tear strength resistance.

## 5 Safety Information

**CAUTION:** Working at heights on sloped-roof surfaces can be dangerous. Do not install until all appropriate safety precautions are followed. Always wear appropriate personal protective equipment (PPE), including appropriate fall protection equipment.

## 6 Installation

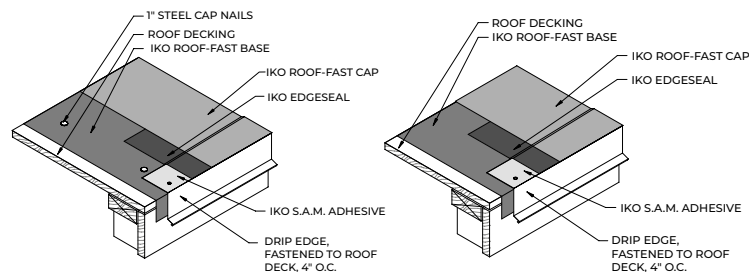

TWO-PLY ROOF-FAST MA APPLICATION - COMBINED

TWO-PLY ROOF-FAST SA APPLICATION - COMBINED

**Roof-Fast must be installed according to all of IKO's application instructions. Some select installation requirements are highlighted here.**

1. The space beneath the roof deck (e.g., attic) should be thoroughly ventilated to minimum local building code requirements.
2. Minimum slope is 1/2:12.
3. The roof deck must be clean, smooth, dry and free of sharp protrusions.
4. In keeping with good roofing practice, apply product when the substrate is dry and the air temperature is between 50°F and 120°F (10°C and 49°C).
5. Acceptable substrates are plywood or oriented strand board, concrete, and metal. See installation guidelines for substrate requirements details.



This product's Safety Data Sheet (SDS) is available [here](#).



Complete product installation details can be found [here](#).

The information on this Technical Data Sheet is based upon data considered to be true and accurate at time of issue, based on laboratory tests and production measurements, and is offered solely for the user's consideration, investigation and verification. Nothing contained herein is representative of a warranty or guarantee for which the manufacturer can be held legally responsible. The manufacturer does not assume any responsibility for any misrepresentation or assumptions the reader may formulate. To confirm the most current product technical information and compliances, please contact IKO directly at: **United States 1-888-IKO-ROOF (1-888-456-7663); Canada 1-855-IKO-ROOF (1-855-456-7663).**

<sup>1</sup>Compliance with listed product standards is based on sampling and testing of products as manufactured. For more information, please contact IKO at: 1-888-IKO-ROOF (1-888-456-7663).