

SBS DECKBASE 44™



IKO SBS DeckBase 44 is a fiberglass reinforced polymer-modified bitumen deck protection membrane.

Fiberglass-Reinforced Deck Protection

IKO's SBS DeckBase 44 is a polymer-modified bitumen roll roofing product. The inner reinforcement consists of a tough, non-woven, glass fibre mat, which has been impregnated and coated with a specially formulated modified bitumen with exceptional elasticity. At 44" wide, this underlay makes installation easy and offers durable, substantial protection from the elements at your roof's eaves. It lays flat for a uniform look, so you don't have to worry about unevenness. It's not a peel and stick product, which means it's easy to remove when it's time to re-roof.

1 Features and Benefits

- ✓ Extra-Wide Roll
- ✓ Flexible And Lightweight
- ✓ Tear-Resistant Membrane

2 General Information

Area/Roll	216 ft. ² (20 m ²)
Rolls/Pallet	40
Pallet Size	52 x 44 in. (132 x 112 cm)
Product Stock No.	0630018

3 Product Dimensions

Length	59 ft. (18 m)
Width	44 in. (1118 mm)
Thickness	55 mils (1.4 mm)

Product dimensions shown are subject to normal manufacturing tolerances of +/- 0.5 ft. (0.15 m) on the sheet's length and +/- 1/8 in. (3 mm) on width.

SBS DECKBASE 44™


4 Applicable Standards¹

ASTM D4601, Type 1

Satisfies the requirements of the Canadian NBC 9.26.5.2 (c)

NOTE: IKO SBS DeckBase 44 meets or exceeds the requirements in the product standards referenced.

6 Installation

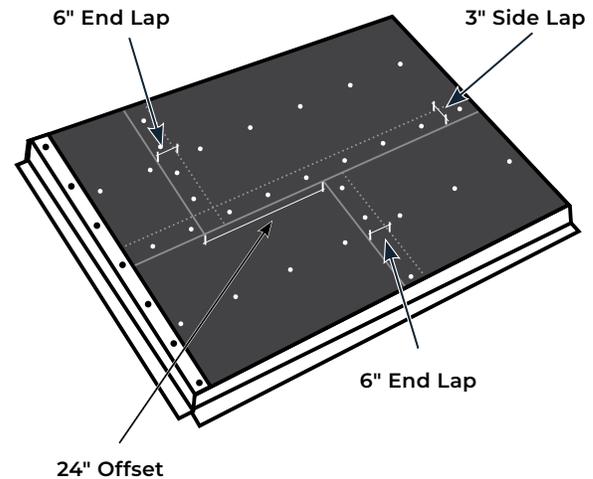

5 Safety Information

CAUTION: Working at heights on sloped-roof surfaces can be dangerous. Do not install until all appropriate safety precautions are followed. Always wear appropriate personal protective equipment (PPE), including appropriate fall protection equipment.

SBS DeckBase 44 must be installed according to all of IKO's application instructions. Some select installation requirements are highlighted here:

1. The space beneath the roof deck (e.g., attic) should be thoroughly ventilated to minimum local building code requirements.
2. Apply the membrane as per building code requirements overhanging eaves by 1/4-inch to 3/4-inch and extending up the roof at least 24 inches from the vertical projection of the interior surface of the outside wall.
3. Side laps must be at least 3 inches using the selvage line as a guide, and end laps must be at least 6 inches and should be located at least 24 inches from those in the previous course.



This product's Safety Data Sheet (SDS) is available [here](#).

Complete product installation details can be found [here](#).



The information on this Technical Data Sheet is based upon data considered to be true and accurate at time of issue, based on laboratory tests and production measurements, and is offered solely for the user's consideration, investigation and verification. Nothing contained herein is representative of a warranty or guarantee for which the manufacturer can be held legally responsible. The manufacturer does not assume any responsibility for any misrepresentation or assumptions the reader may formulate. To confirm the most current product technical information and compliances, please contact IKO directly at: **United States 1-888-IKO-ROOF** (1-888-456-7663); **Canada 1-855-IKO-ROOF** (1-855-456-7663).

¹Compliance with listed product standards is based on sampling and testing of products as manufactured. For more information, please contact IKO at: 1-888-IKO-ROOF (1-888-456-7663).